


### DZR BRASS GATE VALVE (GVDZ20)



### DIMENSIONAL DRAWINGS

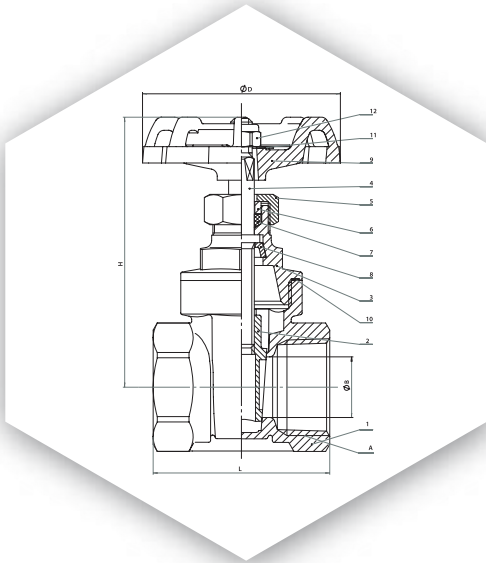

### DIMENSIONS & WEIGHTS

Size	R/G Inch	B mm	D mm	H mm	L mm
15 MM	1/2	12.8	55	70	45
20 MM	3/4	17	55	74.5	49.5
25MM	1	21	60	85	55
32MM	1 1/4	27	72	100	59.5
40MM	1 1/2	34	72	113	63
50MM	2	45	80	131	69
65MM	2 1/2	56	100	160	88

### FEATURES & BENEFITS

- Non-Rising is usefull when shut-off is required and a space saving is necessary
- Solid Wedge Disc, integral seat and bi-directional
- Female threaded ends allow for ease installation
- Screw-in bonnet service where frequent maintenance is required.

### MATERIAL SPECIFICATION

Part No.	Nomenclature	Material
1	Body	CZ132
2	Disc Gate	CZ132
3	Bonnet	CZ132
4	Stem	H62
5	Nut	HPb60-3
6	Packing Washer	HPb60-3
7	Packing	PTFE
8	Clamping Ring	HPb59-1
9	Hand Wheel	HT150
10	Seat Washer	PTFE
11	Sign	0.4mm Aluminium
12	Nut M6	Stainless Steel

### PRESSURE / TEMPERATURE RATING

Pressure Rating	20 bar
Temperature	-10 to 120 °C

### TEST PRESSURES

Shell	30 bar
Seat	22 bar

### SPECIFICATION

- Solid wedge disc, Non-rising stem, screw-in bonnet.
- Single piece wedge.
- Hand wheel operated.
- End connection Threaded to BS EN 10226-2 (ISO 7-1).
- Double O-ring seal - zero leakage guranted
- Design : BS EN 12288: 2010 PN20.
- Testing standard: BS EN 12266-2

TFL Valves Quality Policy Is Complete Satisfaction Of Customers. According To That We Have Selected QUALITY As A Strategic factor in application to all our organization. Our purpose is to reinforce competitiveness, to ensure customer satisfaction, to improve process related with product quality and guarantee accomplishment of quality requirements.